




Home (/) > Products (/product/) > SIP Intercom (/proa/) > Akuvox R29F Smart In

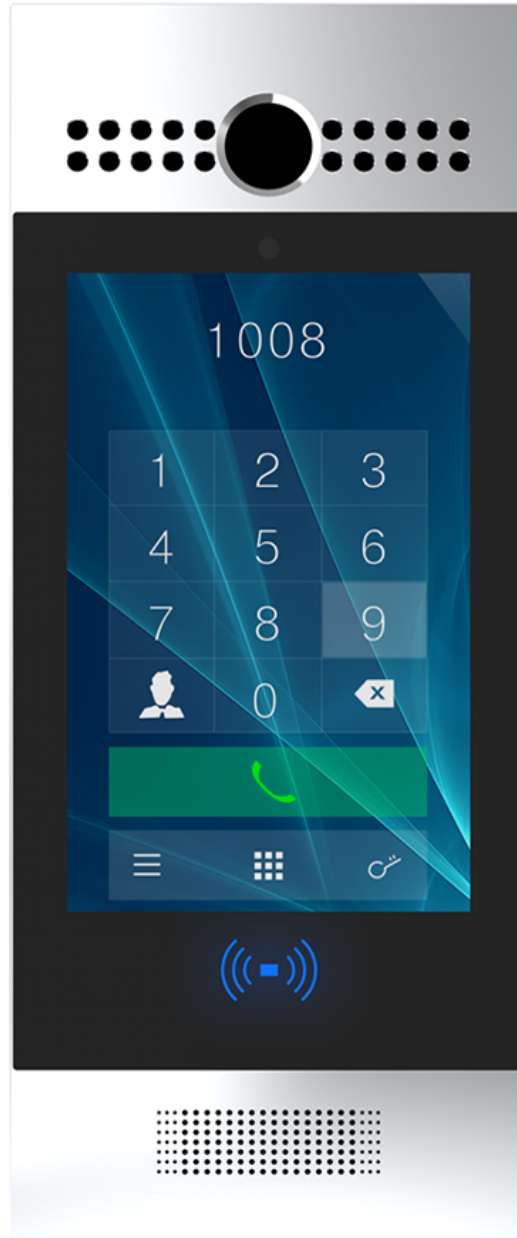

Akuvox R29F Smart Intercom

Tel

Message

Contact Us

Home

(tel:86-502-2122064)

(/contact.shtml)

(/contact.shtml)

(/)

Akuvox

- Premium audio and video quality
- Real-time entrance monitoring
- Remote door opening
- Multiple access methods
- Android 5.1/SIP/ONVIF/Wiegand/PoE/IP65

Online Inquiry

Description

R29F is the industry's most cutting-edge SIP-enabled IP video door phone featuring Android OS and a large capacitive touch screen. It enables easy monitoring of an entrance area and convenient entry control.

The ability of granting or denying access based on talking to and seeing your visitors as if in person, gives one a true sense of security and great peace of mind. Especially for a business, it eliminates the need for personnel to be physically stationed at the door/gate, which improves productivity and frees them up to work on other things.

Physical Features

Body material: aluminum panel

Display: IPS LCD

Screen: 7" capacitive touch screen

Camera: 3M pixels with IR Sensor automatic lighting

Power consumption: 12V DC input, <12W

G-sensor for tamper alarm

Enclosure rating: IP65

Collision-proof rating: IK06

Installation: flush mounting or wall-mounting

Dimensions: 317x130x23 mm

Entry Features

RF card reader: 13.56MHz

Digital keypad: Pass Number

Facial recognition: 32 points of recognition

Other biometric method: gesture

Akuvox

Open A Smart World

Interface Features

1xRJ45 10/100M Mbps Ethernet port

Output relay: 2 relays for door opener

Relays controlled individually by DTMF tones

RS485 port

SIP Features

SIP v1 (RFC2543), SIP v2 (RFC3261)

Line: 2 SIP accounts

Audio Features

1 built-in microphone with IP67 rating

2W speaker with IP66 rating

Codec: G.711a, G.711 μ , G.722 and G.729

Speech quality: 7 kHz

Echo cancellation

Voice activity detection

Comfort noise generator

Max. call length setting

Video Features

Viewing angle: 72°

Resolution: up to 720p

Image transfer rate: 720p@30fps max.

Camera permanently operational

Auto-night mode with LED illumination

Illumination: 0.1LUX min.

Auto white balance

Internal light sensor: image lighting during dark hours

Codec: H.263 and H.264

Support RTSP

Compliance with ONVIF

Network Features

Static IP or DHCP

NTP for auto time setting

Administration Features

Auto-provisioning: FTP/TFTP/HTTP/HTTPS/PnP

Open A Smart World

Configuration management: web- or touch screen-based management or auto provisioning

Application Scenarios


Office door phone with on-site or hosted IP-PBX

Control remote site entry over the internet

Perfect for apartment / flat intercom with door access control

Bonus function: business information display or a welcome screen

Online Inquiry

Name	Phone	E-mail *
Content *		
Code		Submit

Previous: No Prev

Next: Akuvon R27A IP Video Intercom (/proa/pro2.shtml)

Copyright©AKUVOX All rights reserved. Sitemap (/map.shtml) 

